

**SAYCA**  
ACRYLIC LAMINATES

**SAYCA**  
ACRYLIC LAMINATES

**SAYCA**  
ACRYLIC LAMINATES



Scan For  
Catalogue PDF

**6H** ANTI SCRATCH  
HARDNESS

**1.5mm**  
100% ACRYLIC  
ANTI YELLOW



Sayka having best in class aesthetics feature under this head. Drafted using state of the art technology, these Laminates come with an assurance of durability and long term surface finesse. They can lift the mood of any and every type of ambiance



**6H** ANTI SCRATCH  
HARDNESS

## PRODUCT FEATURES

-  High Gloss Finish
-  Scratch Resistance
-  Anti Bacterial Surface
-  Easy to Clean
-  Stain Resistance
-  100 % Pure Acrylic





**6H** ANTI SCRATCH  
HARDNESS


SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**


**SAYCA**  
ACRYLIC LAMINATES




**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3311



SY-3312



SY-3313





**6H** ANTI SCRATCH  
HARDNESS


SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**


**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3314



SY-3315



SY-3316





**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**


**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3317



SY-3318



SY-3319



**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**


**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3320



SY-3321



SY-3322





**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**  
■■■■

**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW

IMPRESSIVE



SY-3323



SY-3324



**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**

**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3325



SY-3326



SY-3327





**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**


**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3328



SY-3329



SY-3330



**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**

**SAYCA**  
ACRYLIC LAMINATES




**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3331



SY-3332



SY-3333





**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

**SOLID SURFACE**

**SAYCA**  
ACRYLIC LAMINATES



**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3334



SY-3335



SY-3336




**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM

MIRROR SERIES  
■■■■■

**SAYCA**  
ACRYLIC LAMINATES

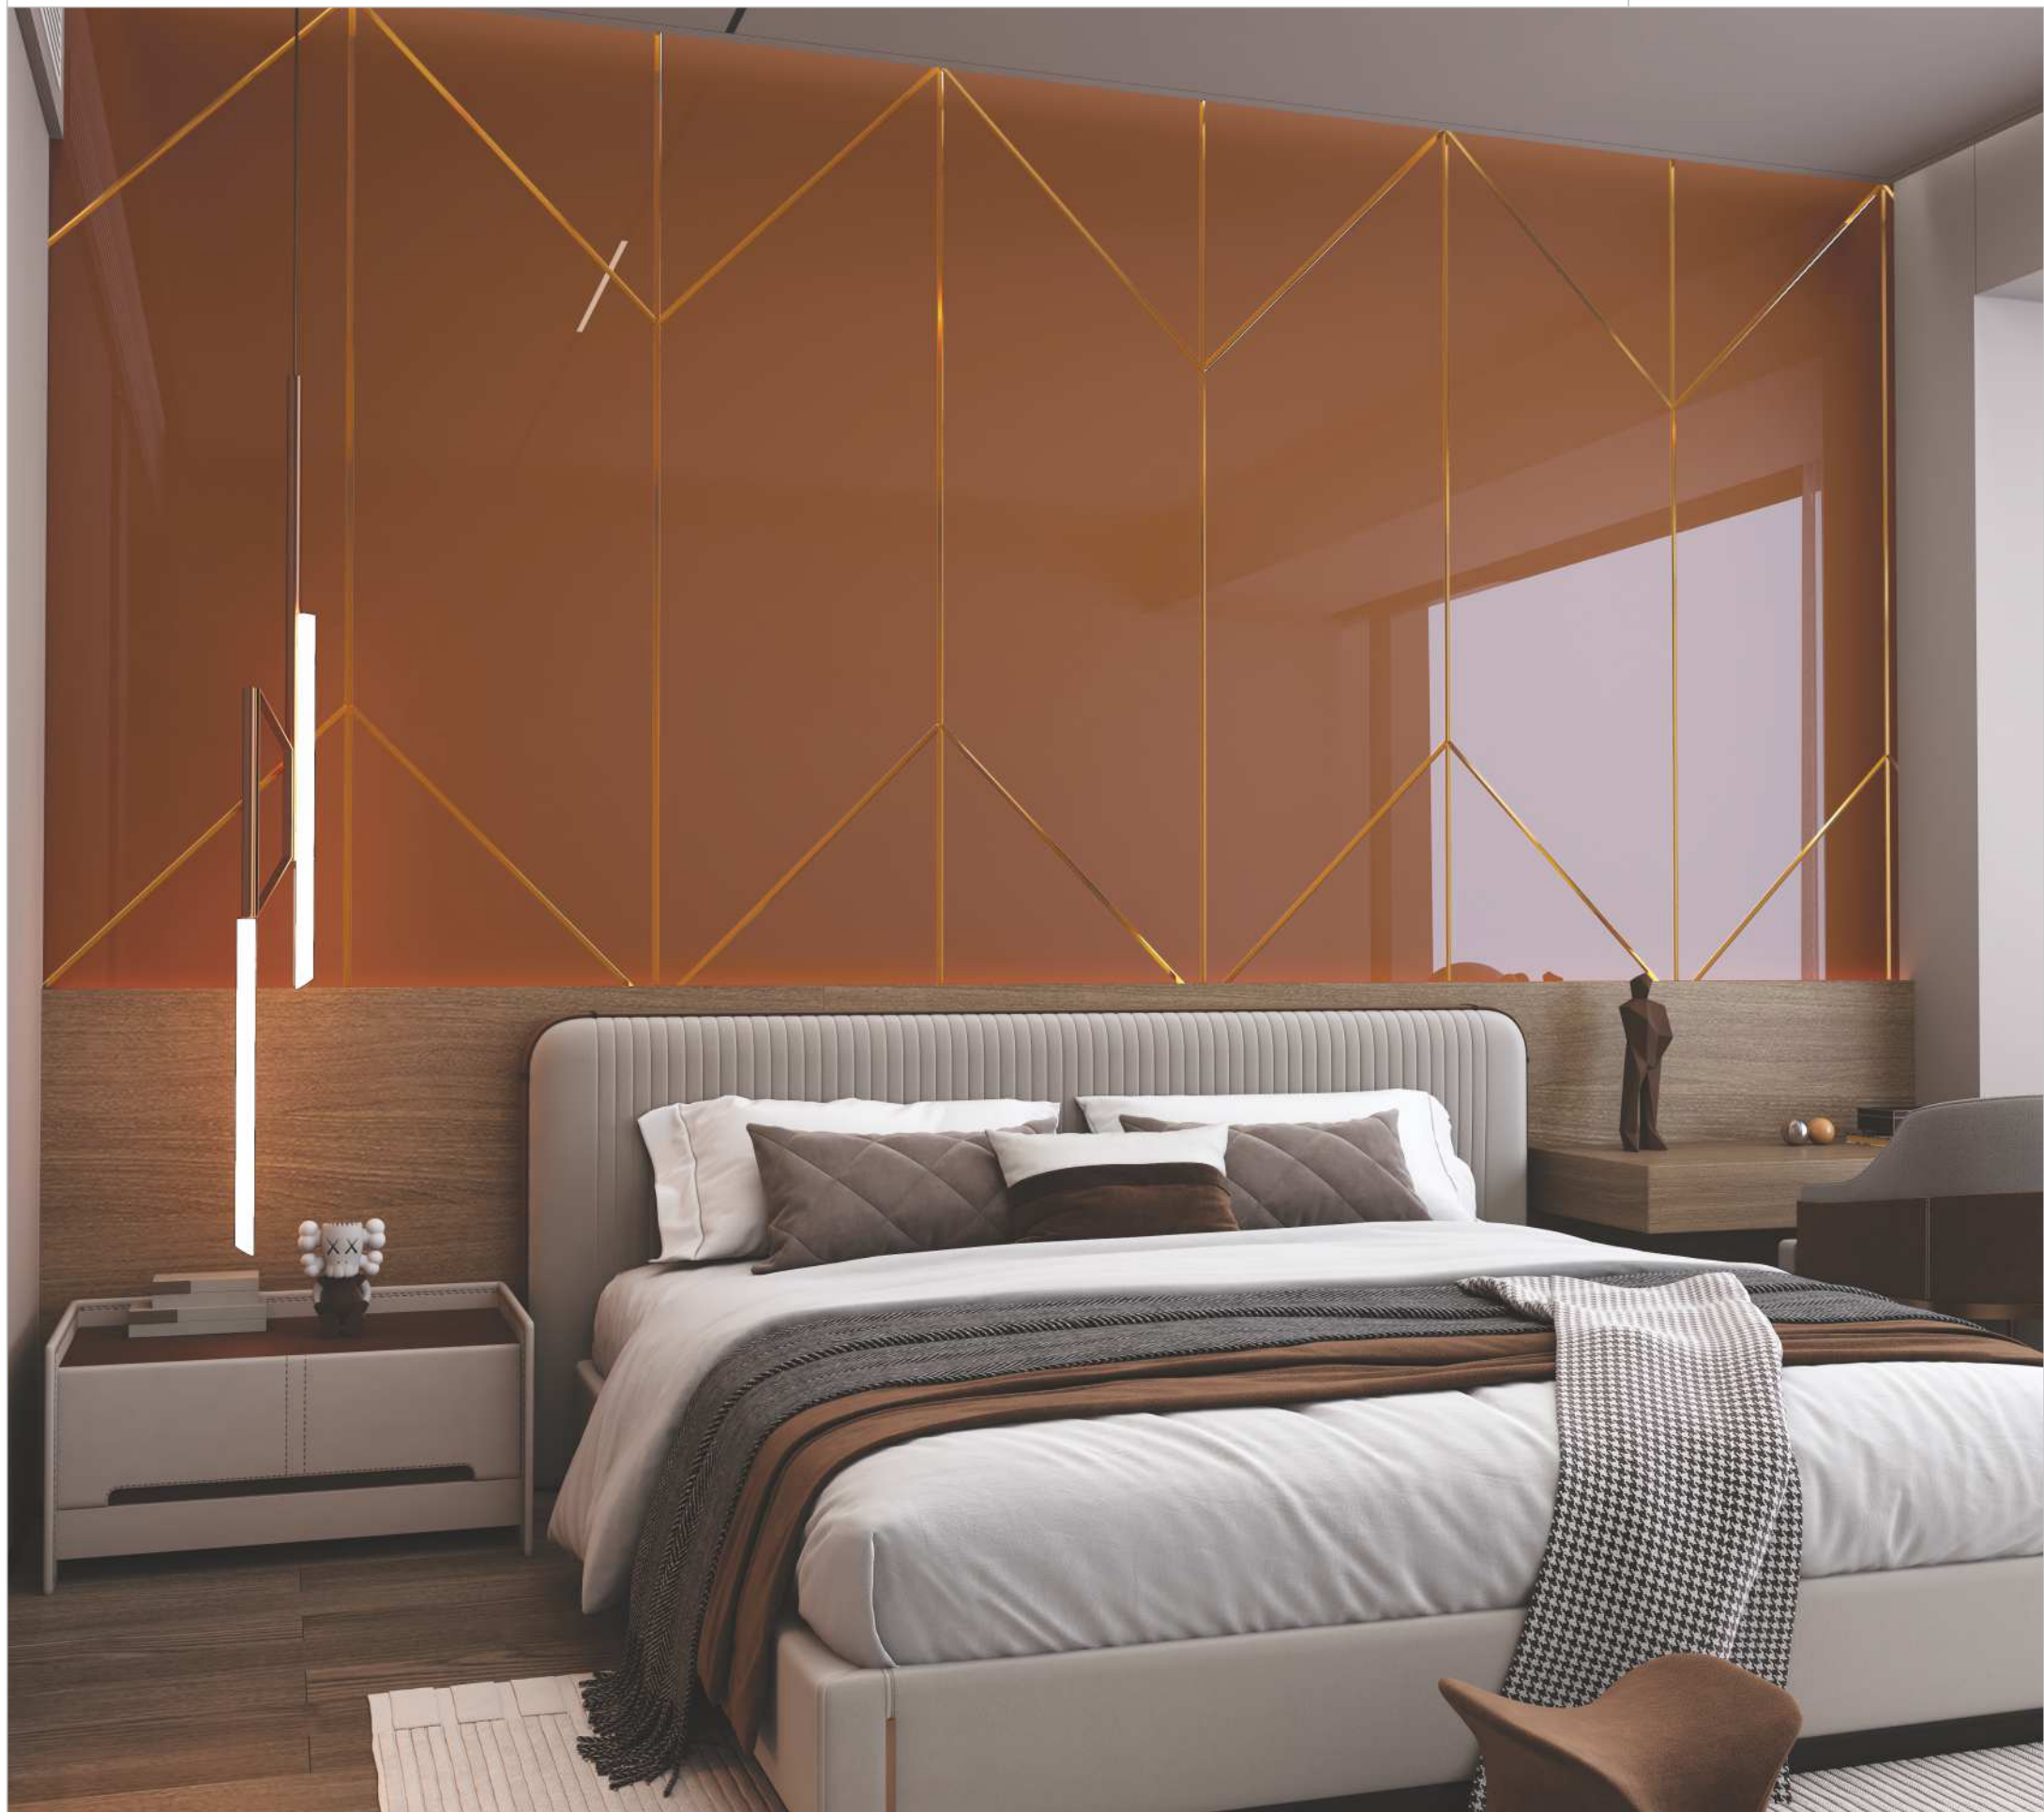

**1.5mm** 100% ACRYLIC  
ANTI YELLOW



SY-3337



SY-3338



SY-3339



**6H** ANTI SCRATCH  
HARDNESS

SIZE : 2440x1220 MM  
THICKNESS : 1.5 MM



**1.5mm** 100% ACRYLIC  
ANTI YELLOW

**MARBLE SERIES**

**SAYCA**  
ACRYLIC LAMINATES



Scan QR Code  
Product Full View



SY-3340




Scan QR Code  
Product Full View



SY-3341



Scan QR Code  
Product Full View

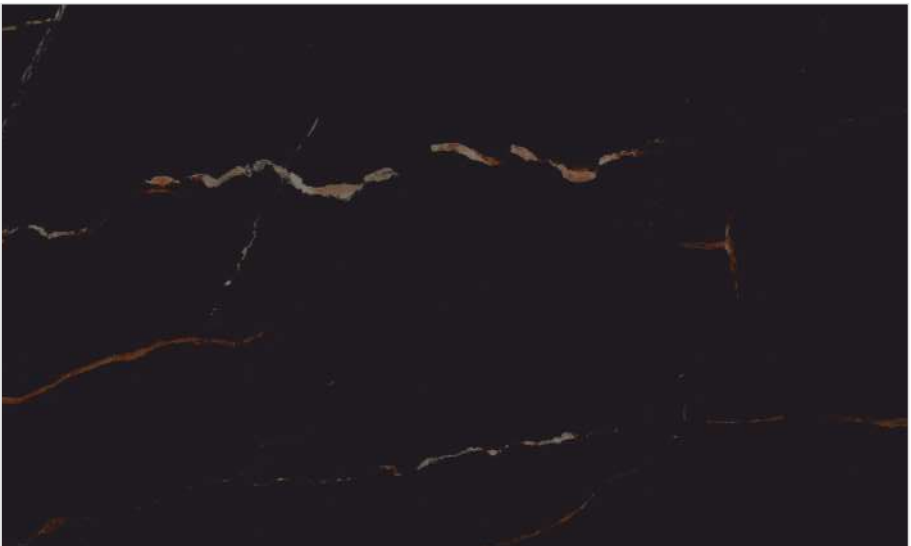


SY-3342





TECHNICAL SPECIFICATION


Parameter	Acrylic Laminate	High Gloss Laminate Mica	PU Coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Anti Scratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
Dry Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes


Reasons For Air Bubble Formations On Laminates:


- 

Laminates Are Bonded In Extremely Humid Conditions
- 

Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)
- 

When Substrate Loses Moisture After Installation.
- 

Debonding In Certain Areas Because Of Uneven Substrate Surface
- 

Use Of Extremely Large Acrylic/pvc Laminate Sheets (more Than 8 Ft X 2ft Long)
- 

Insufficient Or Lack Of Pressing During The Bonding Period Of Laminate

The Company Is Not Responsible For Any Kind Of Complains Regarding Damage Of The Furniture For Laminates. The Resins Seen Here Can Have Many Possibilities Like Inferior Quality Of Plywood, Any Mistake While Using It. The Company Is Responsible Only Till The Sheet Is Not Used.

HOW TO CARE

- Cleaning Should Be Done With Water And Clean, Non-abrasive Cloth.
- To Remove More Stubborn Stain, Use Mild Household Cleansers Like Colin To Gently Wipe Down With A Non-abrasive Cloth.
- Avoid The Use Of Abrasive Liquid Cleanser's, Bleaching Compounds Or Solutions As These May Damage The Surface Of The Laminate.
- Do Not Place Hot Cookware Directly On The Laminate. Prolonged Exposure To Temperature Above 30 Degrees Celsius May Cause Damage To The Laminate Surface.
- Do Not Use The Laminate For Purposes That It Is Not Intended For (E.g. Do Not Iron Chop, Hammer Or Expose The Laminate To Open Flame)
- Outdoor Application Of The Laminate With Exposure To Direct Sunlight And Conditions Are Not Recommended.
- UV Rays May Be Shaping The Laminate.
- Gloss Surface Are Recommended Only For Vertical Application.
- Peel Off The Protective Film After Processing.
- Have A Thickness Balance Of +/- 0%

LIMITED WARRANTY

SAYKA Products Are Tested To Be Reasonably Free Of Defects, And When Used And Fabricated Properly They Will Comply With The Applicable Manufacturing Specifications Within Realistic Deviations. We Recommend Customers To Inspect Properly Before Installing. SAYKA Warranty In On Way Covers Defects And Non-compliance Or Otherwise Attributable To Any Other Causes, Including Without Limitation The Following:

- Improper Handling / Transportation / Storage.
- There Will Be No Guarantee Or Exchange Under Any Circumstances Improper Installation.
- Color Variations In Products From Different Batches Are Possible.
- Improper Or Unintended Usage.
- We Recommend Using Products From Same Batch To Avoid Color Variations.
- lack Of Or Improper Maintenance.
- This Brochure Is For Presentation Purpose Only.
- Exposure To High Temperatures.
- Unauthorized Alteration To The Products.
- Outdoor Applications.
- Exposure To Direct Sunlight Can Gravely Affect A Laminate's Appearance.
- Use Interior Or Sub-standard Dipped Plywood Or Dipped Lipping Patti,which May Chemically React The Adhesive.
- The Use Of Synthetic Rubber Adhesives Such As Sr / Jat Pat, Bostic, Heatex, Etc.
- Prolonged Exposure To High Temperature (above 30°C-35°C).
- If Hot Cookware Or Utensils Are Directly Placed On The Laminate.
- To Avoid The Inside Cracks & Stretch Line, Do Not Store Acrylic Sheet In Roll From.

DISCLAIMER

- Do Not Use Plywood With High Moisture Content.
- Do Not Use Ply With Uneven Surface.
- Avoid Using Interior Quality Adhesive.
- Apply Sufficient Pressure.
- We Do Not Recommend Pasting Of Sheets On The Printed/branding Area Of The Plywood.

There Can Be Colour Variation From Different Batches. It Is Advised To Use Same Batch Material To Avoid Colour Variations. Actual Colour Of The Acrylic Sheet May Vary From This Brochure.